

# DURASTRAND pointSIX LETS YOU BUILD FEARLESSLY, IN ANY WEATHER

Proven in the Pacific Northwest, its patented tapered edge holds the line on all four edges. A proprietary blend of resins and waxes blocks moisture, meaning sub-floors go down flat and stay that way. Engineered for strength, durability, overall performance, and backed by our 1-year no-sand guarantee, nothing can hold you back.



West Fraser is a diversified wood products company with more than 60 facilities in Canada, the United States, the United Kingdom, and Europe. From responsibly sourced and sustainably managed forest resources, the Company produces lumber, engineered wood (OSB, LVL, MDF, plywood, particleboard), and other products including pulp, newsprint, wood chips, and renewable energy.

**PRODUCTIVITY RE-FRAMED**

**ROOF**



**WALLS**

**TALLWALL**  
WALL SHEATHING

**WINDSTORM**  
Wall Sheathing

**QUAKEZONE**  
Wall Sheathing

**DURASTRAND**  
pointSIX EDGE TECHNOLOGY

**TruFlor**  
pointSIX EDGE TECHNOLOGY

**FLOORS**

LEARN MORE AT [WESTFRASER.COM/OSB](https://www.westfraser.com/osb)

21.1011 / v1.0 / 2021-01-27



# HOLD YOUR EDGE RAIN OR SHINE




**DURASTRAND**  
pointSIX EDGE TECHNOLOGY

**PREMIUM SUB-FLOOR**

## SMALL TAPER – HUGE ADVANTAGE

West Fraser's Durastrand pointSIX premium sub-floor features patented tapered-edges that are designed to be effective against edge swell. If the floor is exposed to rain or humidity, the tapered edges expand to become flush with the surface without ridging - the result, floors go down flat and stay that way.

- ✓ pointSIX taper on both 4 foot and 8 foot edges
- ✓ Increase productivity by eliminating the need to sand joints
- ✓ One-year no-sand guarantee
- ✓ Engineered for strength, durability and overall performance
- ✓ Backed by a 50-year limited warranty
- ✓ Meets or exceeds PS2 standards

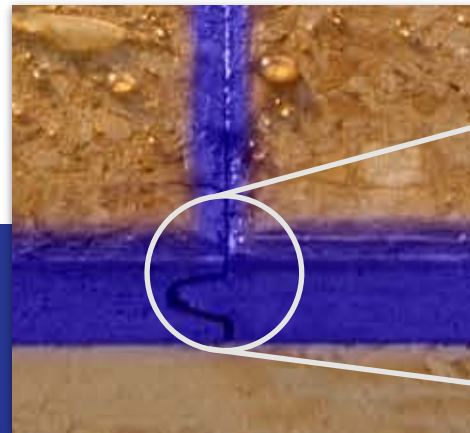

LOOK FOR THE DISTINCTIVE  
PURPLE EDGE FOR  
PREMIUM PERFORMANCE

## THE PROOF: 14-DAY FLOOD TEST

Durastrand pointSIX has been extensively researched and tested in our facilities. One test involved flooding Durastrand pointSIX floor panels with water for 14 days.

The result: After two weeks of flooding, Durastrand pointSIX sub-flooring dried out firm and flat, successfully minimizing the effect of edge swelling.



**1 YEAR  
NO-SAND  
GUARANTEE**

LEARN MORE AT  
**WESTFRASER.COM/OSB**